Fiilex **P3 COLOR**

Portable LED Light

Fiilex　P3COLOR は高出力 90W LED の機能がたった 0.9 kg のコンパクトなハウジングに詰め込まれており、色温度可変は 2000 - 10000K に対応し、どの帯域でも優れた演色性を発揮
様々なカラーコントロールモードにより鮮やかな RGB 照明（フルカラー出力）での演出を可能にします
P3 が高性能である理由として Fiilex が持つ特許があります
非常に小さく高密度な MATRIX LED が多重ではない
美しいシングルシャドーを生成
バンドアでカットした場合も従来のハロゲンライト同様に
とても自然な光と影を作り出します

FEATURES

- 2000 - 10000K の高演色性
- 0 - 100%のスムースな調光（フリッカーレス）
- IPX5 相当の防滴防塵仕様
- V マウント、電源を容易にヨークへ取り付け可
- 8or16bit カラーモード
  HIS、Effects、CCTRGBW、Gels、CIExy
- スムース且つシャープな多数のモード
- DMX にてファンモードを変更可

Fiilex

P3 COLOR

Portable LED Light

SPECIFICATIONS

Beam Angle	60° (20° with fresnel accessory)
CCT Range	2000-10000K continuous tuning + magenta/green shift
CRI / TLCI	95 / 90 typical
Control Modes	CCT, HSI, RGBW, Gels, Effects, CCTRGBW, CCTHSI, CIExy, ICTHS, and more
Dimming	100% - 0% flicker free
Dimming Modes	Smooth, Sharp
Light Engine	1x 75W DiCon Dense Matrix LED
Power Consumption	90W max AC | 80W max DC
BTUs/hour	307 (BTUs/hour) max
DC Input	14 - 30V DC (via 5.5mm x 2.5mm Barrel)
AC Input	100 - 240V AC, 50 ~ 60Hz (via 5.5mm x 2.5mm Barrel)
DMX/RDM Port	TRRS (XLR-5 DMX Adapter accessory available)
USB Power Output	5V/1A (via USB-C)
Weight	2.0lbs / 0.9kg
Size (L x W x H)	4.7" x 5.6" x 8.1" / 11.9cm x 14.2cm x 20.6cm
Mount	Baby stud 5/8'' female (16mm)
IP Rating	IP-X5 (water-resistant)
Thermal Design	Advanced vapor cooling system (fan cooled)
Operating Temperature	32 - 104°F / 0 - 40°C

PHOTOMETRIC DATA

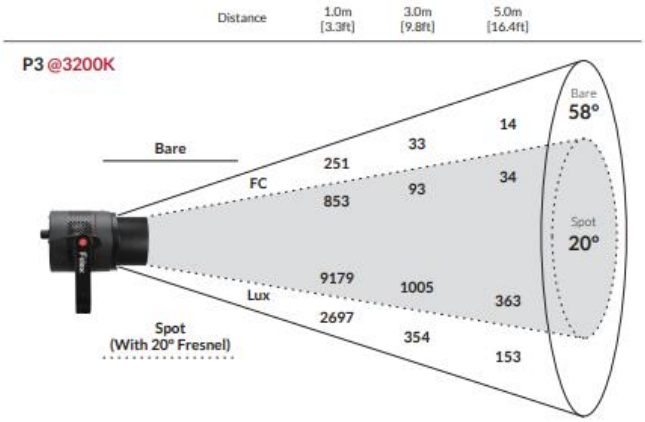

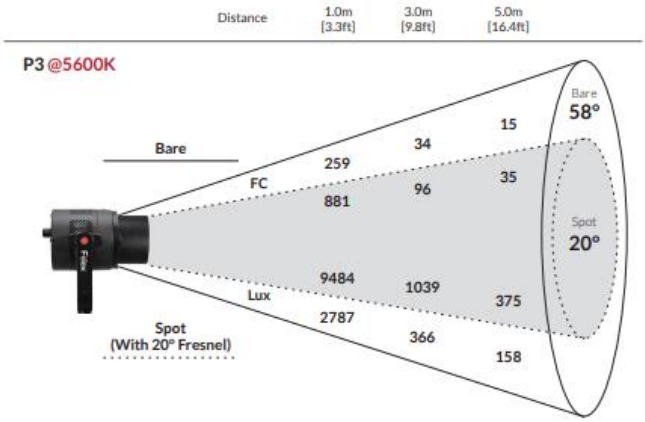

ACCESSORIES

Dome Diffuser (1-Stop)

20° Fresnel

Snoot for Fresnel

D-Tap Cable - 24" Curled

V-Mount with 5/8" Baby Pin Receiver

DMX Adapter

P3 Recessed Lens, Narrow

P3 Recessed Lens, Wide

販売代理店

株式会社　石谷ライティングサービス

〒112-0005　東京都文京区水道２−１−５　　TEL:03-5840-6901　　FAX:03-5840-6902

e-mail:info@ishitani-lighting.co.jp　　web:www.ishitani-lighting.co.jp